







# **Product card**

### **Roof sandwich panel**




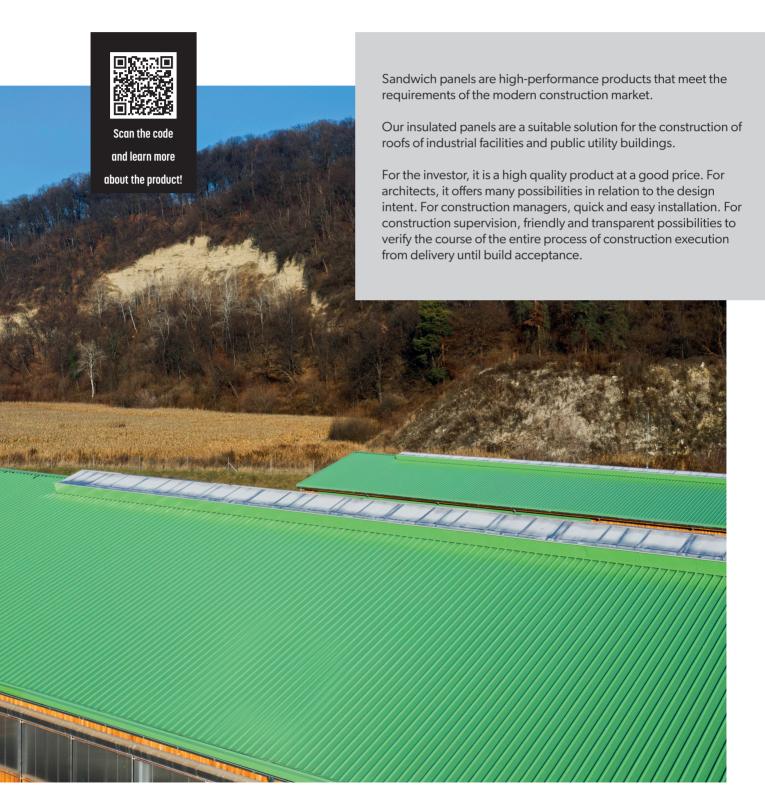


# **Technical information**

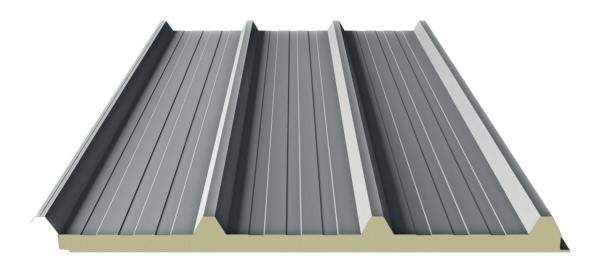

### **Board cross-section**

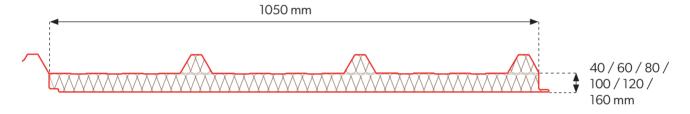

# Joining of panels

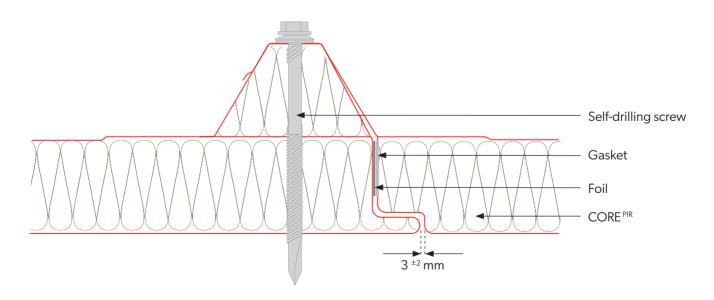

### **Technical information**

Core	PIR						
Density [kg/m³]	40 ± 3						
PIR panel thickness [mm]	40	60	80	100	120	160	
Weight [kg/m²]	9,6	10,4	11,2	12,0	12,8	14,8	
Effective width [mm]	1050						
Total width [mm]	1127						
Min. panel length [m]	2,0						
Max. panel length [m]	15,0						
Outer/inner sheet thickness [mm]	0,4-0,7 / 0,4-0,7						
U-value [W/m²K]	0,55	0,37	0,28	0,22	0,18	0,14	
Fire spread degree	NRO						
Type of external / internal profiling	[T40] / [M], [T] , [F]						
External / internal corrosion resistance	C1, C2, C3 (C4 ÷ C5) / A1 (A2 ÷ A5)						
Standard coatings	Poliester Interior [INT], Poliester Standard [RAL], HERCULIT [HC], MULTILAYER 40 [MLT]						
Special coatings	PVDF, PUR, PVC (P), PVC (F) - FoodSafe						
Accessories	fixing system, seals, flashings, rooflight SPR-SKY						


# Packaging of sandwich panels

Panel thickness [mm]	Modular width [mm]	Number of panels per pack [pcs]	Number of packages on a vehicle [pcs]	Maximum package height [mm]	Package height [mm]	Panel weight [kg/m2]	Weight of 1 package [kg]	Surface area of panels [m2/car]**
40	1050	20	4	1300	2600	9,6	2721,6	1134,0
60	1050	10	6	900	2700	10,4	1474,2	850,5
80	1050	12	4	1300	2600	11,2	1905,1	680,4
100	1050	10	4	1300	2600	12	1701,0	567,0
120	1050	8	4	1220	2440	12,8	1451,5	453,6
160	1050	6	4	1180	2360	14,8	1258,7	340,2



<sup>\*\*</sup> Surface area of panels on car calculated for panel lengths of 13.5 m.

# **External profiling**




TRAPEZOIDAL 40 [T40]




# **Internal profiling**



TRAPEZOIDAL[T]









FLAT[F]

### **Coatings and colors**

POLIESTER Interior [INT] - Available colors for interior cladding



#### POLIESTER Standard [RAL] - Available colors for exterior cladding



#### HERCULIT [HC]



#### MULTILAYER 40 [MLT] - Available colors for exterior cladding





Printing technology does not allow faithful rendering of colors. Therefore the colors shown are indicative and may differ from actual colors.




In addition, on individual order, non-standard colors and coatings are available, outside the palette shown (PVDF, PUR, PVC (P), PVC (F) - FoodSafe).

# **Coating parameters**

Code	Coating thickness	Corrosion resistance	UV resistance
POLIESTER Interior [INT]	15 μm	RA2	Not applicable
POLIESTER Standard [RAL]	25 μm	RC3	RUV2
HERCULIT [HC]	35 µm	RC4	RUV4
MULTILAYER 40 [MLT]	40 μm	RC3	RUV3

#### **Notes**

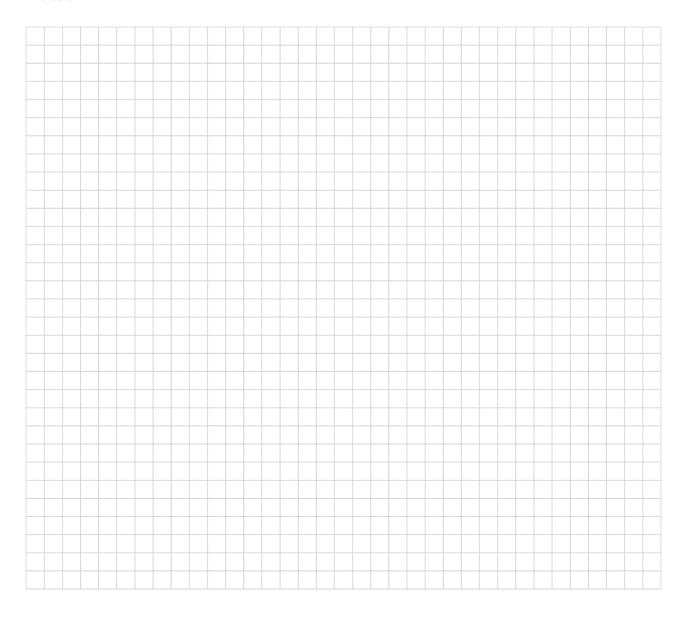





**MODULAR SERIES** 



**COMPACT SERIES** 



**CLASSIC SERIES** 



RETRO SERIES



PANEL SERIES







TRAPEZOIDAL











Wall Sandwich PANELS



SKRIN, LINEA, SINUS









**PERFORATION** 







