



THE POWER OF ROOFS



Product card

Roof sandwich panel






Scan the code and learn more about the product! Sandwich panels are high-performance products that meet the requirements of the modern construction market.

Our insulated panels are a suitable solution for the construction of roofs of industrial facilities and public utility buildings.


For the investor, it is a high quality product at a good price. For architects, it offers many possibilities in relation to the design intent. For construction managers, quick and easy installation. For construction supervision, friendly and transparent possibilities to verify the course of the entire process of construction execution from delivery until build acceptance.

Chiller Martin


Technical information

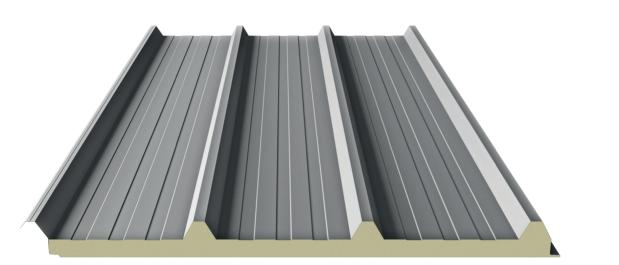

Board cross-section

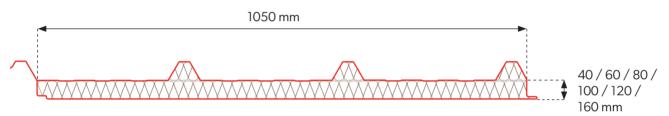

Joining of panels

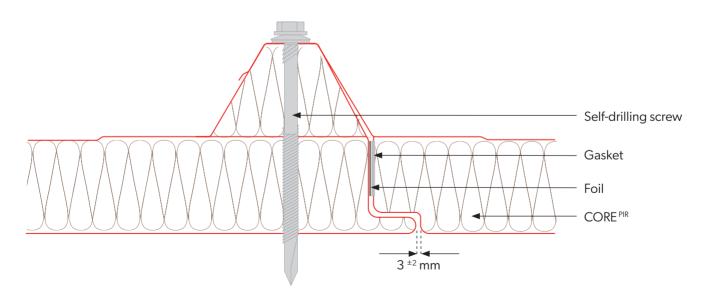

Technical information

Core	PIR					
Density [kg/m³]	40 ± 3					
PIR panel thickness [mm]	40	60	80	100	120	160
Weight [kg/m²]	9,6	10,4	11,2	12,0	12,8	14,8
Effective width [mm]	1050			·		
Total width [mm]	1127					
Min. panel length [m]	2,0					
Max. panel length [m]	15,0					
Outer/inner sheet thickness [mm]	0,4-0,7	/ 0,4-0,7				
U-value [W/m²K]	0,55	0,37	0,28	0,22	0,18	0,14
Fire spread degree	NRO					
Type of external / internal profiling	[T40]/[M], [T] , [F]				
External / internal corrosion resistance	C1, C2, C	C3 (C4 ÷ C5) /	' A1 (A2 ÷ A5))		
Standard coatings		[·] Interior [INT YER 40 [MLT]], Poliester St	andard [RAL]	, HERCULIT [HC],
Special coatings	PVDF, PU	JR, PVC (P), P	VC (F) - Foods	Safe		
Accessories	fixing sy	stem, seals, f	lashings, roo	flight SPR-SK	Y	


Packaging of sandwich panels


İ

	Panel thickness [mm]	Modular width [mm]	Number of panels per pack [pcs]	Number of packages on a vehicle [pcs]	Maximum package height [mm]	Package height [mm]	Panel weight [kg/m2]	Weight of 1 package [kg]	Surface area of panels [m2/car]**
	40	1050	20	4	1300	2600	9,6	2721,6	1134,0
	60	1050	10	6	900	2700	10,4	1474,2	850,5
	80	1050	12	4	1300	2600	11,2	1905,1	680,4
Ī	100	1050	10	4	1300	2600	12	1701,0	567,0
	120	1050	8	4	1220	2440	12,8	1451,5	453,6
	160	1050	6	4	1180	2360	14,8	1258,7	340,2

** Surface area of panels on car calculated for panel lengths of 13.5 m.


External profiling





Internal profiling



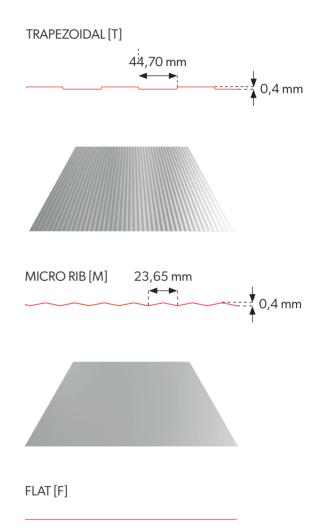

Internal and external profiling are available in any configuration.

ļ




ATTENTION! Due to the structure of sandwich panels with FLAT [F] profiles, the so-called effect may occur. "waves" of the sheet metal. This is a natural phenomenon for this type of products. We recommend contacting the technical department to choose the optimal solution.

Coatings and colors

POLIESTER Interior [INT] - Available colors for interior cladding



POLIESTER Standard [RAL] - Available colors for exterior cladding

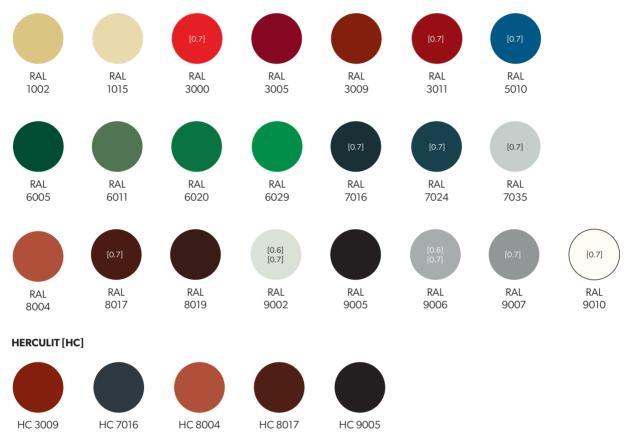

MULTILAYER 40 [MLT] - Available colors for exterior cladding





Printing technology does not allow faithful rendering of colors. Therefore the colors shown are indicative and may differ from actual colors.



In addition, on individual order, non-standard colors and coatings are available, outside the palette shown (PVDF, PUR, PVC (P), PVC (F) - FoodSafe).

Coating parameters

Code	Coating thickness	Corrosion resistance	UV resistance
OLIESTER Interior [INT]	15 μm	RA2	Not applicable
OLIESTER Standard [RAL]	25 µm	RC3	RUV2
IERCULIT [HC]	35 µm	RC4	RUV4
IULTILAYER 40 [MLT]	40 µm	RC3	RUV3

Notes





MODULAR SERIES



RETRO SERIES







Wall Sandwich PANELS

COMPACT SERIES



PANEL SERIES



TRAPEZOIDAL





SKRIN, LINEA, SINUS





CLASSIC SERIES











PERFORATION





