



THE POWER OF ROOFS



l

Product card

Wall sandwich panel with concealed fastening






Scan the code and learn more about the product! Sandwich panels are high-performance products that meet the requirements of the modern construction market.

Suitable for the construction of exterior and interior wall claddings and ceilings of industrial or public utility facilities.


For the investor, it is a high quality product at a good price. For architects, it offers many possibilities in relation to the design intent. For construction managers, quick and easy installation. For construction supervision, friendly and transparent possibilities to verify the course of the entire process of construction execution from delivery until build acceptance.

<section-header>

Board cross-section

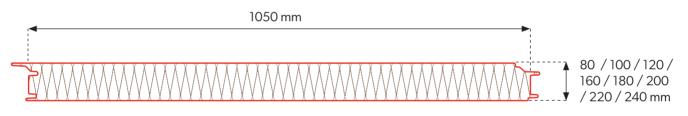

Joining of panels

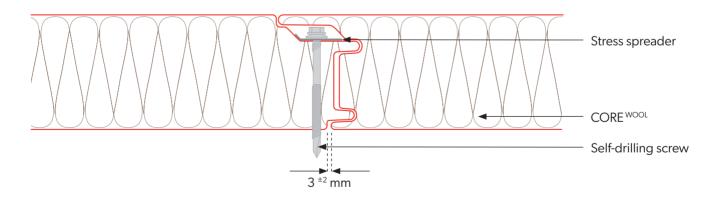

Technical information

Core	WEŁNA													
Density [kg/m³]	100 ± 1	0												
WOOL panel thickness [mm]	80	80 100 120			180	200	220	240						
Weight[kg/m²]	16,6	18,6	20,6	24,6	26,6	28,6	30,6	32,6						
Effective width [mm]	1050													
Total width [mm]	1102													
Min. panel length [m]	2,5	2,5												
Max. panel length [m]	13,5	13,5												
Outer/inner sheet thickness [mm]	0,5-0,7	7 / 0,5-0,7												
U-value [W/m²K]	0,54	0,43	0,36	0,27	0,24	0,22	0,20	0,18						
Fire spread degree	NRO													
Type of external / internal profiling	[M], [T]	,[R],[F]/	[M], [T], [F]											
External / internal corrosion resistance	C1, C2,	C3 (C4 ÷ (C5) / A1 (A	2 ÷ A5)										
Standard coatings		er Interior AYER 40 [I		ester Stand	lard [RAL],	, HERCULI	[HC],							
Special coatings	PVDF, F	PUR, PVC (I	P), PVC (F)	- FoodSafe	•									
Accessories	fixing s	system, sea	als, flashing	gs, rooflig	ht									

Packaging of sandwich panels

ĺ

Panel thickness [mm]	Modular width [mm]	Number of panels per pack [pcs]	Number of packages on a vehicle [pcs]	Maximum package height [mm]	Package height [mm]	Panel weight [kg/m2]	Weight of 1 package [kg]	Surface area of panels [m2/car]**
80	1050	15	4	1300	2600	17,5	2480,6	567,0
100	1050	12	4	1300	2600	19,5	2211,3	453,6
120	1050	10	4	1300	2600	21,5	2031,8	378,0
160	1050	7	4	1220	2440	25,5	1686,8	264,6
180	1050	6	4	1180	2360	27,5	1559,3	226,8
200	1050	6	4	1300	2600	29,5	1672,7	226,8
220	1050	5	4	1200	2400	31,5	1488,4	189,0
240	1050	5	4	1300	2600	33,5	1582,9	189,0


** Surface area of panels on car calculated for panel lengths of 9 m.

-----^{*} 0,4 mm

'=**≸** 0,4 mm

External profiling



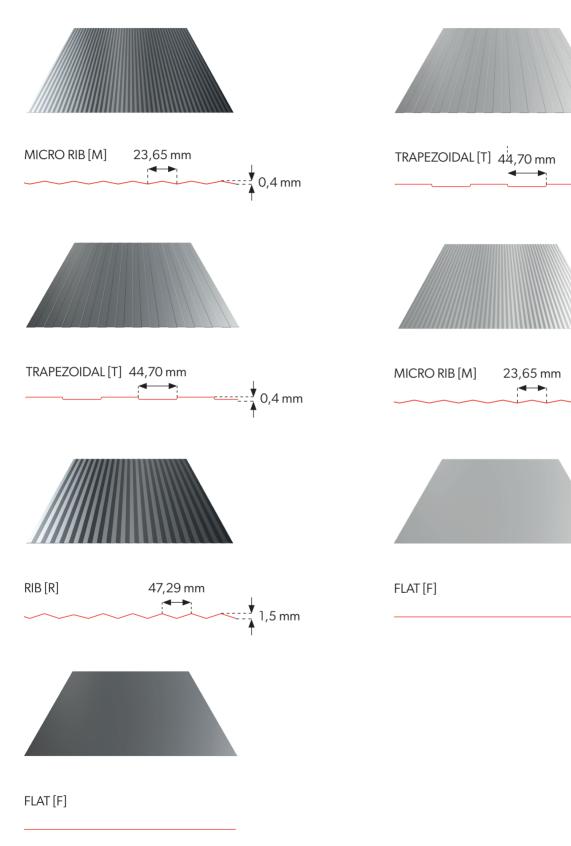

Internal and external profiling are available in any configuration.

İ




ATTENTION! Due to the structure of sandwich panels with FLAT [F] profiles, the so-called effect may occur. "waves" of the sheet metal. This is a natural phenomenon for this type of products. We recommend contacting the technical department to choose the optimal solution.

Coatings and colors

POLIESTER Interior [INT] - Available colors for interior cladding



POLIESTER Standard [RAL] - Available colors for exterior cladding

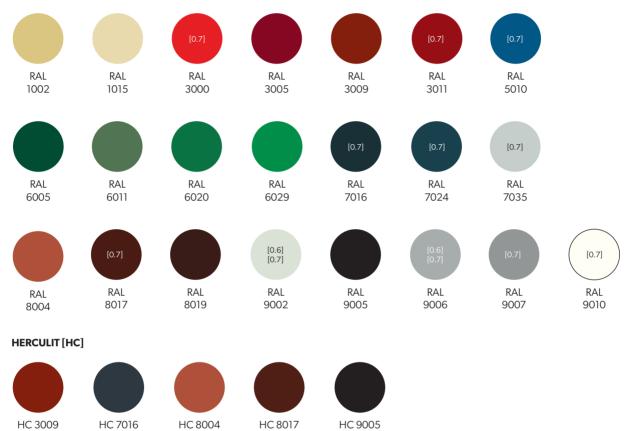

MULTILAYER 40 [MLT] - Available colors for exterior cladding





Printing technology does not allow faithful rendering of colors. Therefore the colors shown are indicative and may differ from actual colors.



In addition, on individual order, non-standard colors and coatings are available, outside the palette shown (PVDF, PUR, PVC (P), PVC (F) - FoodSafe).

Coating parameters

Code	Coating thickness	Corrosion resistance	UV resistance
POLIESTER Interior [INT]	15 μm	RA2	Not applicable
POLIESTER Standard [RAL]	25 µm	RC3	RUV2
IERCULIT [HC]	35 µm	RC4	RUV4
MULTILAYER 40 [MLT]	40 µm	RC3	RUV3

Notes

-																		-	
-													_					-	_
-																		-	
-											 	 	_				 		
											_	 _	_	_			 	_	
																		-	_
																		-	_





MODULAR SERIES



RETRO SERIES







Wall Sandwich PANELS

COMPACT SERIES



PANEL SERIES



TRAPEZOIDAL





SKRIN, LINEA, SINUS



CLASSIC SERIES











PERFORATION





