

Product card - Wall sandwich panel with visible fastening



THE POWER OF ROOFS



Product card

Wall sandwich panel with visible fastening







Technical information



Board cross-section



Joining of panels

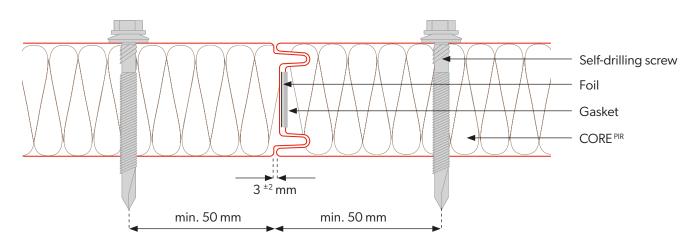



Module availability is determined individually with the sales department.

Technical information

Core	PIR	PIR									
Density [kg/m³]	40 ± 3										
PIR panel thickness [mm]	40	60	80	100	120						
Weight[kg/m²]	9,4	10,3	11,1	11,9	12,8						
Effective width [mm]	1150, 100	0*									
Total width [mm]	1171, 1021	*									
Min. panel length [mb]	2,5										
Max. panel length [mb]	13,5										
Outer/inner sheet thickness [mm]	0,4-0,7/0	0,4-0,7									
U-factor [W/m²K].	0,55	0,37	0,28	0,22	0,18						
Reaction to fire	B-s1,d0										
Wall resistance to external fire	EI15	EI15	EI15	EI45	EI45						
Type of profiling ext. / int.	[R], [M], [T],[F]/[M],[T]	, [F]								
Corrosion resistance ext. / ext.	C1, C2, C3	s (C4 ÷ C5) / A1	(A2 ÷ A5)								
Standard coatings		nterior [INT], Po ER 40 [MLT]	bliester Standard	l [RAL], HERCUL	.IT [HC],						
Special coatings	PVDF, PUR	8, PVC (P), PVC (F) - FoodSafe								
Accessories	Fastening	system, gasket	s, flashings, ligh	nting profiles							

Packaging of sandwich panels

Panel thickness [mm]	Modular width [mm]	Quantity of panels in a package	Quantity of packages per vehicle	Package height [mm]	Package weight[kg]	Maximum Ioading length [m]	Quantity of panels per vehicle [m2]
40	1150	19	6	860	2580	12	1573
60	1150	13	6	880	2640	12	1076
80	1150	15	4	1300	2600	12	828
100	1150	12	4	1300	2600	12	662
120	1150	10	4	1300	2600	12	552





Module availability is determined individually with the sales department.

External profiling MICRO RIB [M] 23,65 mm --► ----¥0,4 mm TRAPEZOIDAL [T] 44,70 mm -----\$[♥] 0,4 mm RIB [R] 47,29 mm -**∲** 1,5 mm

Internal profiling







FLAT [F]

FLAT [F]

ļ


Internal and external profiling are available in any configuration.

Coatings and colors

POLIESTER Interior [INT] - Available colors for interior cladding



POLIESTER Standard [RAL] - Available colors for exterior cladding

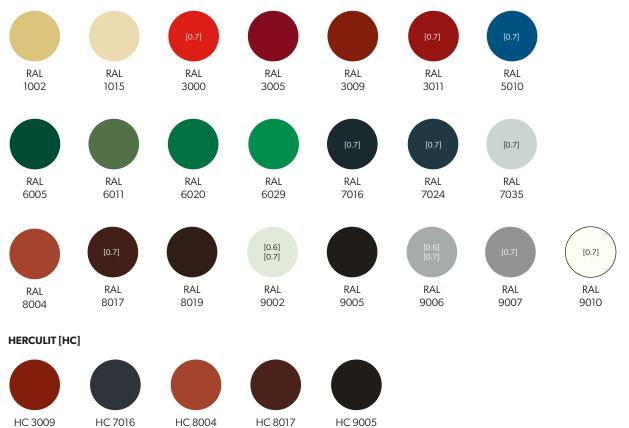

HC 9005

MULTILAYER 40 [MLT] - Available colors for exterior cladding

HC 8004

HC 8017





Printing technology does not allow faithful rendering of colors. Therefore the colors shown are indicative and may differ from actual colors.



In addition, on individual order, non-standard colors and coatings are available, outside the palette shown (PVDF, PUR, PVC (P), PVC (F) - FoodSafe).

Coating parameters

Code	Coating thickness	Corrosion resistance	UV resistance
POLIESTER Interior [INT]	15 µm	RA2	Not applicable
POLIESTER Standard [RAL]	25 µm	RC3	RUV2
IERCULIT [HC]	35 µm	RC4	RUV4
NULTILAYER 40 [MLT]	40 µm	RC3	RUV3

Notes

			 _							_				 						 		
																					_	
	 				_						 	_								 		
		_	 _								 			 						 		
 	 		 _								 			 						 		
-			 	-												-						
-				-		_																
-			 	_							 			 						 		
	 		_								 			 						 		
			-																			
						_		_				_	_		_	_	_			_		
			 														_					
-				_																 		
_											 			 						 		

02/2023/EN





Modular roofing tiles MODULAR SERIES



RETRO SERIES



INGURI



FLASHINGS



Wall Sandwich

SERVICES

Compact roofing tiles
COMPACT SERIES

HHH



PANEL SERIES

TRAPEZOIDAL



ACCESORIES



SKRIN, LINEA, SINUS

SERVICES



Steel roofing tiles CLASSIC SERIES



PV PANELS



FLAT METAL



Roof Sandwich



PROSYSTHERM



PERFORATION





