



**Karta výrobku –
Modulový strešný
panel **FIT****



THE POWER OF ROOFS



Technické parametre

TECHNICKÉ ÚDAJE [mm]		
Názov	FIT S	FIT L
Výška drážky	22	
Celková šírka	558	
Efektívna šírka	527	
Hrúbka plechu	0,5	
Dĺžka plechu	1020	2040
Dĺžka záložky pri delení kusov	30	
Uhly sklonu strechy	>9°	
Montáž	zacvakávací zámok	

V súčasnosti sú modulárne strešné panely FIT v našej ponuke dostupné v troch povrchových úpravách: hladká [F], MICRO RIB [M].



Hladký povrch [F]



Profilovanie
MICRO RIB [M]



Dostupnosť v dvoch povrchových úpravách: **ULTIMAT [UTK]** a **HERCULIT [HC]**, čo zaručuje opakovateľnosť farby aj štruktúry.



Tento produkt nájdete v našej knižnici BP2 BIM pre architektov a projektantov www.bp2.eu/architekti




Výrobok je dostupný v dvoch štandardných dĺžkach: **1020 mm i 2040 mm**



Pred montážou si prečítajte návod na montáž, ktorý je k dispozícii na www.bp2.eu



Dizajn panela

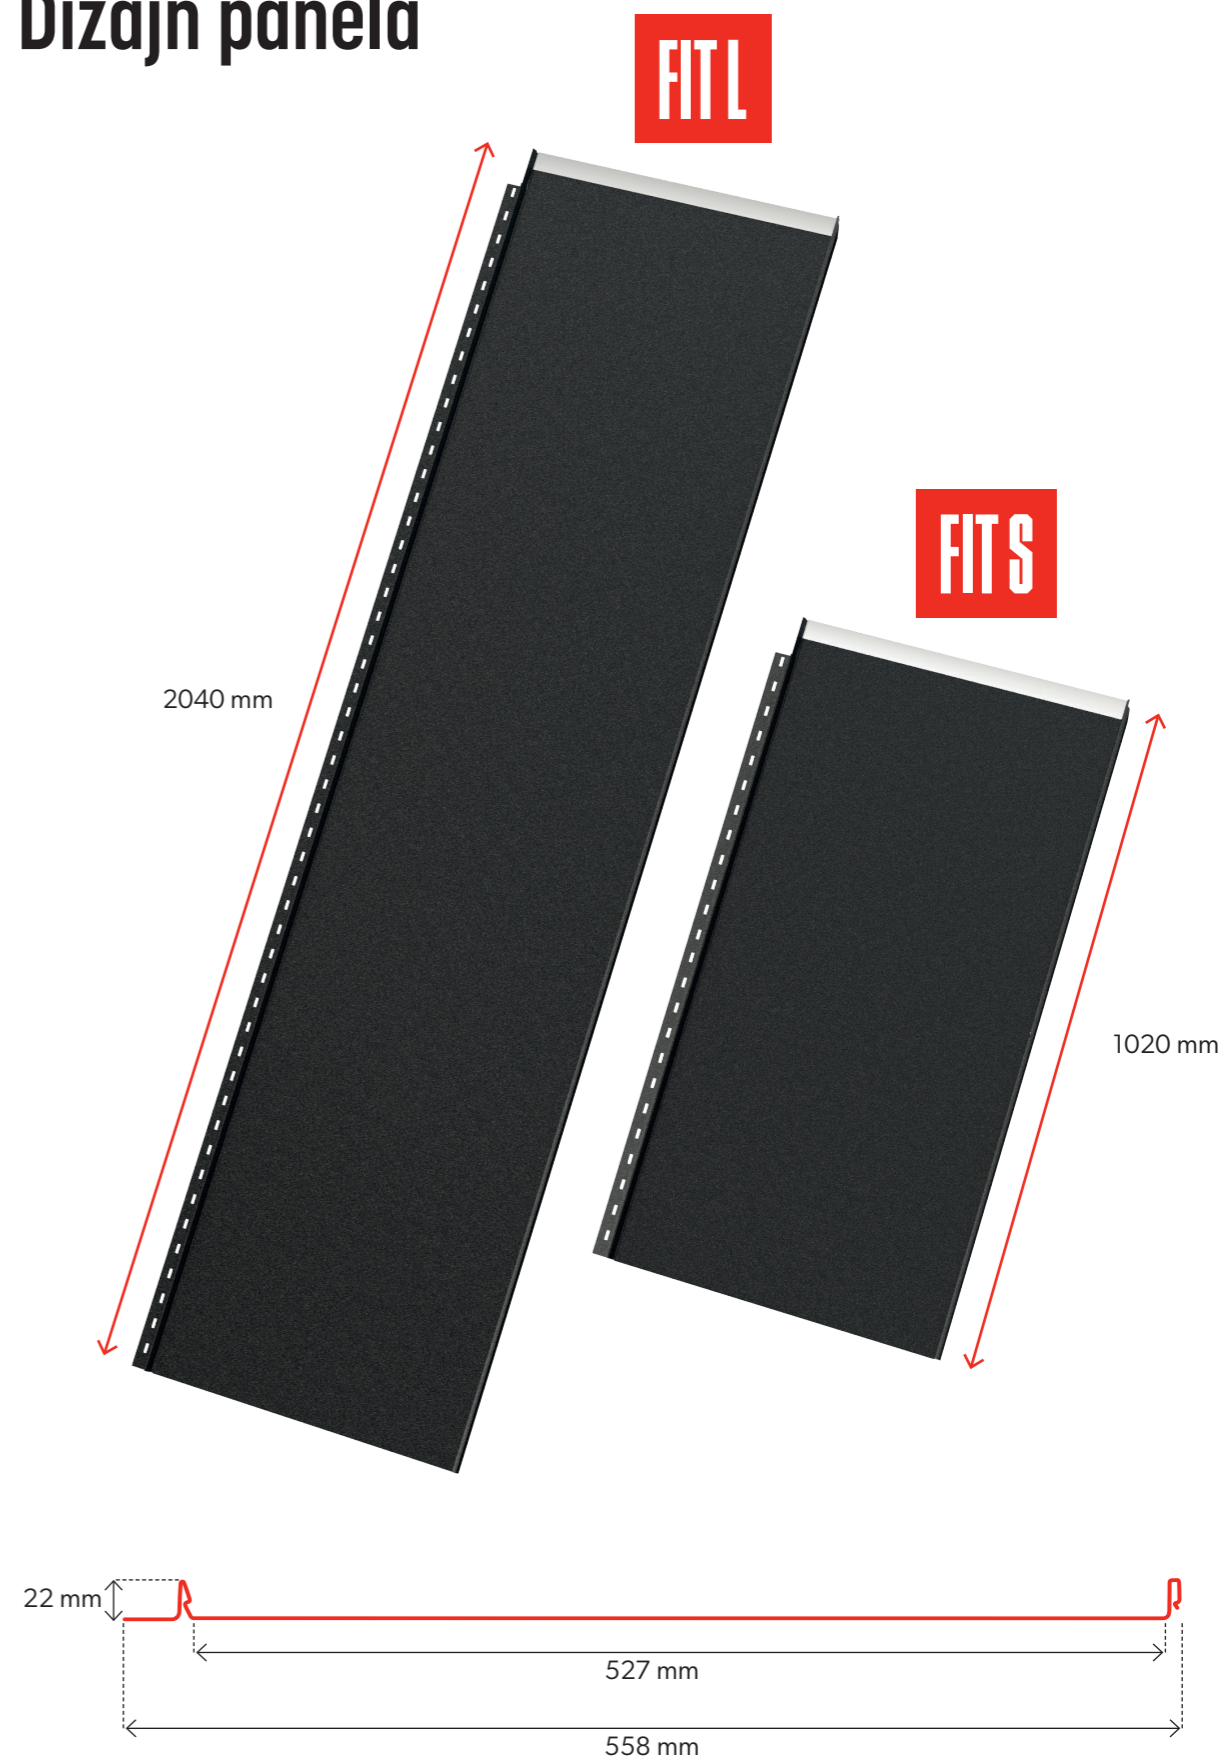




Modular roofing tiles
MODULAR SERIES



Compact roofing tiles
COMPACT SERIES



Steel roofing tiles
CLASSIC SERIES



Retro roof tiles
RETRO SERIES



Roof panels
PANEL SERIES



INTEGRATED
PV PANELS



Steel roof gutter system
INGURI



TRAPEZOIDAL
SHEETS



FLAT METAL
SHEETS



FLASHINGS



ACCESORIES



Roof Sandwich
PANELS



Wall Sandwich
PANELS



Facade cladding
SKRIN, LINEA, SINUS



Wall cassette and
PROSYSTEM



Uncoiling and slitting
SERVICES



Flat sheets and cutting
SERVICES



PERFORATION
of sheets

